



4K100TX


4K HDBaseT transmitter

- The 4K100TX is an industry leading 4K HDBaseT transmitter delivering HDMI, Bi-directional IR and PoH (PoE) up to lengths of 100m (4K up to 70m) over a single CAT cable. The 4K100TX also features 1x HDMI loop out for integrating local displays or cascading to multiple devices, Bi-directional IR & RS-232, Bi-directional PoH (PoE), Ethernet.

Front :




Rear :

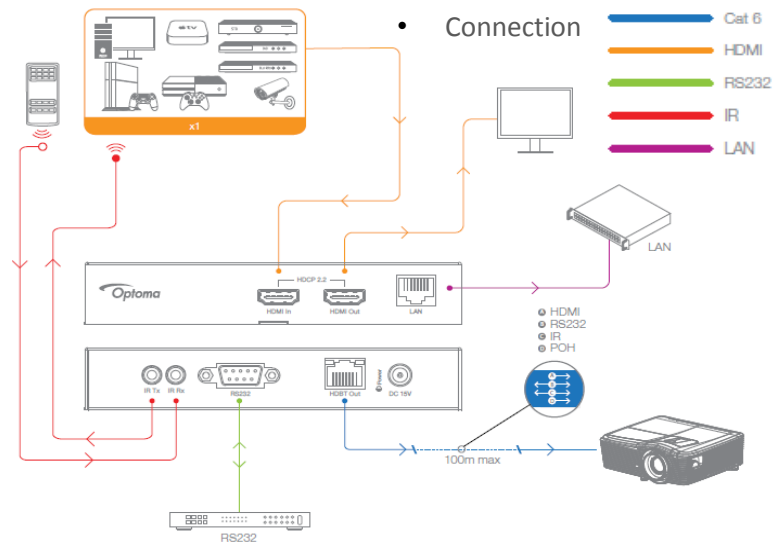

Specifications

Input /Output	HDMI In (HDMI 2.2), HDMI Out, LAN (RJ45), HDBaseT Out, RS232, IR Tx, IR Rx, DC In
Power	DC 15V Input
Dimension	115 x 140 x 25 mm (W x D x H) / Weight : 0.5 Kg
Features	Advanced HDBaseT technology offering uncompressed video and audio with zero latency
	Extends HDMI up to a distance of 100m over single CAT cable
	Supports 4K UHD video up to 70m (3840 x 2160 @30Hz 4:4:4, 4096 x 2160 @24Hz 4:4:4, and 4K @60Hz 4:2:0)
	Supports all industry standard video resolutions including VGA-WUXGA and 480i-4K
	Supports 3D signal display
	Features 1x HDMI loop out for integrating local displays or cascading to multiple devices
	Supports all known HDMI audio formats including Dolby TrueHD, Dolby Atmos, Dolby Digital Plus and DTS-HD Master Audio transmission
	Bi-directional RS-232 pass through
	Bi-directional IR from all input and output locations
	Bi-directional PoH (Power over HDBaseT) to power extenders from either Matrix products or transmitter end
HDCP 2.2 support	

*The appearance and specifications of all items are subject to change without notice



Optoma Corporation

12F, No.215, Beixin Road., Xindian Dist.,

New Taipei City, Taiwan 231, R.O.C.

Tel: +886 2 8911 8600 Fax: +886 2 8911 6550

www.optoma.com